


MICC | LIGHT & HEAVY DUTY RGM CABLE GLANDS

MICC ATEX CABLE GLANDS - LIGHT DUTY

MICC Glands

ATEX & IECEx Approved Brass Glands

ATEX & IECEx approved Brass glands for use in both hazardous and standard working environments. Some sizes are seal dependent, a guide is given below. Manufactured and tested in compliance with EN 60079-0, EN 60079-1 and EN 60079-3. MICC Glands are specifically approved for apparatus (type of protection 'd') Zones 1 & 2, Groups IIA, IIB and IIC

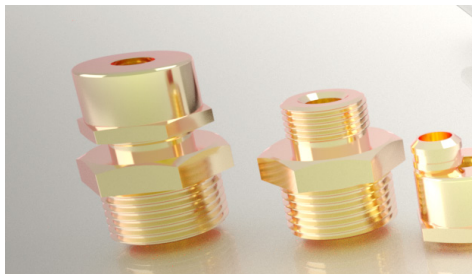

MICC RGM Cable Glands (Light Duty)

Remora RGM Glands are designed to be used with mineral insulated cables. They are precision manufactured from high quality extrusion brass and approved for hazardous areas.


Hazardous: Atex Zones 1 & 2 EExd

Markings: II 2G 1D, Ex db IIC Gb and Ex Ta IIIC Da WMC


Protection: IP54

Temperature Range: -20°C to 450°C

Material: Brass BS 2874



Code	Entry Thread			Pack
	Size	Length	Cap Diameter	QTY
RGM2L1.0	M20 x 1.5	13.0	18.5	10
RGM2L1.5	M20 x 1.5	13.0	18.5	10
RGM2L2.5	M20 x 1.5	13.0	18.5	10
RGM2L4.0	M20 x 1.5	13.0	18.5	10
RGM3L1.0	M20 x 1.5	13.0	18.5	10
RGM3L1.5	M20 x 1.5	13.0	18.5	10
RGM3L2.5	M20 x 1.5	13.0	18.5	10
RGM4L1.0	M20 x 1.5	13.0	18.5	10
RGM4L1.5	M20 x 1.5	13.0	18.5	10
RGM4L2.5	M20 x 1.5	13.0	18.5	10
RGM7L1.0	M25 x 1.5	13.0	24.0	2
RGM7L1.5	M25 x 1.5	13.0	24.0	2
RGM7L2.5	M25 x 1.5	13.0	24.0	2

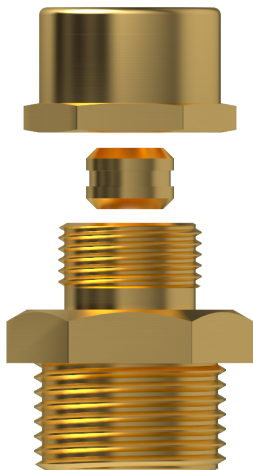

Zone Description

The RGM can be used with flame-proof apparatus sub-groups IIA, IIB, IIC and all other 'Types of protection' including general applications.

- Zone 0: In which an explosive Gas-Air mixture is continuously present or for long periods.
- Zone 1: In which an explosive Gas-Air mixture is Not Likely to occur in normal operation.
- Zone 2: In which an explosive Gas-Air Mixture is Not Likely to occur in normal operation, and if it occurs it will exist only for a short time.

Type of Protection	Zone	App. Grouping	Gland Ref.	Seal Ref.
Flame-proof	Exd	1 2	IIA IIB IIC	RGM RPS RPSL