

INDUSTRIAL CCG® CABLE GLANDS | Cable Glands

INDOOR/OUTDOOR - ALUMINIUM WIRE ARMOUR

Aluminium IP66 CW Gland Kits

The CW aluminium gland is designed for Aluminium Wire Armoured cables (AWA) for general indoor/outdoor use where a seal on the outer sheath is required to obtain an IP rating. Seals on the cable sheath, to IP66 if fitted with a sealing gasket.

- For indoor and outdoor use.
- Two-part handling, no loose parts.
- Seals on both the inner and outer sheath to IP66
- Freely rotating captive cone, providing an armour clamp and earth bond without twisting the armouring.
- Precision manufactured from high quality Aluminium.
- Supplied complete with IP sealing washer.

Design Standards: BS 6121 Part 1 IEC/BS EN 62444
SANS 62444 SANS 1213

Protection: IP66 (Parallel) IEC 60529
Marine: ABS IEC 60529, IEC 62444
DNV IEC 60529, BS 6121, IEC 62444


London Underground Approval: BS EN 62444



Temperature Range: -65°C to 120°C
Material (Gland): Aluminium ASTM B221
Material (Seal): Thermoset Elastomer



Kit Code	Low Smoke LS Kit Code	Size	Cable OD (B)		Gland Length (L2)	Armour Dia (F)		Thread Entry (C)	Length (L1)	A/F	A/C
			Min	Max		Min	Max				
GPCWA1	GPCWA1LS	1 - 20	14.5	20.5	60.0	0.90	1.25	M20 x 1.5	10.0	27.0	30.0
GPCWA2	GPCWA2LS	2 - 25	20.5	26.5	65.0	1.25	1.60	M25 x 1.5	10.0	35.0	39.0
GPCWA3	GPCWA3LS	3 - 32	26.5	33.5	70.0	1.60	2.00	M32 x 1.5	10.0	42.0	47.0
GPCWA4	GPCWA4LS	4 - 40	33.0	42.5	76.0	1.60	2.00	M40 x 1.5	15.0	52.0	59.0
GPCWA5s	GPCWA5sLS	5s - 50s	34.0	47.0	82.0	2.00	2.50	M50 x 1.5	15.0	65.0	73.0
GPCWA5	GPCW5ALS	5 - 50	42.5	52.5	90.0	2.00	2.50	M50 x 1.5	15.0	65.0	73.0
GPCWA6	GPCW6ALS	6 - 63	52.5	65.5	99.0	2.00	2.50	M63 x 1.5	15.0	80.0	90.0

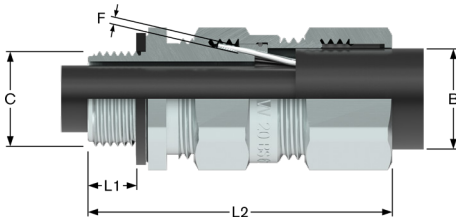


Kits and Accessories

Kits supplied with;
2 glands, 2 locknuts, 2 earthtags, 2 PVC or LS shrouds (M20-M32)
1 gland, 1 locknut, 1 earthtag, 1 PVC or LS shrouds (M40-M63)

Earthtags
(see p.182)

Gland Pack
Locknuts
(see p.178)



Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution