

STAINLESS STEEL CABLE CLEATS



Vulcan+ Quad

Single or Dual-Fixing

Vulcan+ Quad cleats have a unique compact design so they can be easily installed, even when space is limited. Vulcan+ cleats are available in multiple sizes with range-taking capability, to suit trefoil, single, quad or bundled cables. Manufactured in Type 316L Stainless Steel, Vulcan offer excellent protection against the harshest environmental conditions. To protect and cushion the cables during short-circuit conditions, the cleat comes with an integral Low Smoke and Fume Zero Halogen Polymeric liner and base pad. We recommend fixing VRQ+ using one 10mm bolt for sizes 01 to 06, and one or two 10mm bolts for sizes 07 to 09. Alternative bolt recommendations on request.

316L Stainless Steel Quad Cleat


- Compact design
- Excellent weathering and corrosion resistance
- Excellent tensile strength
- Excellent stiffness

Standards: European Standard IEC 61914:2021
ABS DNV Type Approved, UL Listed

Max Short-Circuit: 104kA 600mm Spacing
132kA 300mm Spacing

Temperature Range: -40°C to 60°C

Material: 316L Stainless Steel / Polymeric Liner/Base Pad

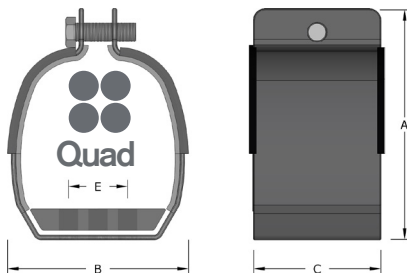

| Code | Quad Cable Range | | Dimensions | | | | | Fixing Holes | Weight (g) | Fixing Kit |
|---------|------------------|------|------------|-------|------|------|---------|--------------|------------|------------|
| | Min | Max | (A) | (B) | (C) | (E) | | | | |
| VRQ+00C | 10.0 | 13.0 | 93.0 | 63.0 | 54.0 | N/A | 1 x M10 | 287 | TCFK10-25 | |
| VRQ+00B | 13.0 | 18.0 | 97.0 | 67.0 | 54.0 | N/A | 1 x M10 | 280 | TCFK10-25 | |
| VRQ+00A | 18.0 | 20.0 | 106.0 | 70.0 | 54.0 | N/A | 1 x M10 | 291 | TCFK10-25 | |
| VRQ+00 | 19.0 | 25.0 | 113.0 | 74.0 | 54.0 | N/A | 1 x M10 | 317 | TCFK10-25 | |
| VRQ+01 | 23.0 | 25.0 | 110.0 | 68.0 | 54.0 | N/A | 1 x M10 | 284 | TCFK10-25 | |
| VRQ+02 | 26.0 | 27.0 | 113.0 | 70.0 | 54.0 | N/A | 1 x M10 | 286 | TCFK10-25 | |
| VRQ+03 | 28.0 | 31.0 | 128.0 | 78.0 | 54.0 | N/A | 1 x M10 | 318 | TCFK10-25 | |
| VRQ+03A | 31.0 | 35.0 | 138.0 | 90.0 | 54.0 | N/A | 1 x M10 | 350 | TCFK10-25 | |
| VRQ+04 | 35.0 | 42.0 | 148.0 | 103.0 | 54.0 | N/A | 1 x M10 | 378 | TCFK10-25 | |
| VRQ+05 | 43.0 | 47.0 | 165.0 | 120.0 | 54.0 | N/A | 1 x M10 | 452 | TCFK10-25 | |
| VRQ+06 | 48.0 | 50.0 | 170.0 | 121.0 | 54.0 | N/A | 1 x M10 | 467 | TCFK10-25 | |
| VRQ+07 | 51.0 | 57.0 | 190.0 | 140.0 | 54.0 | 50.0 | 3 x M10 | 486 | TCFK10-25 | |
| VRQ+08 | 58.0 | 63.0 | 200.0 | 150.0 | 54.0 | 50.0 | 3 x M10 | 499 | TCFK10-25 | |
| VRQ+09 | 64.0 | 70.0 | 218.0 | 170.0 | 54.0 | 75.0 | 3 x M10 | 581 | TCFK10-25 | |



Fixing Kit (see p.206)

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution

Ident & Wiring Term
Copper Lugs
Heatshrink Repair
Cable Joining
Junction Boxes
Flexible Conduit
Cable Glands
Gland Accs.
Cable Cleats
Earthing Lightning
MCC Cable
Cable Ties & Acc
Tooling & Cable Prep
Fixing & Security