

Multi-Reel

Multi-Reel PVC Sleeving

The PVC Multi Reel is designed with electricians in mind. It is supplied on one reel, which is split into 3 sections. Our RoHS compliant high grade PVC flexible Earth Sleeving is manufactured from premium virgin grade compound and is available in diameters of 2.0mm, 3.0mm or 4.0mm. The 2.0mm and 3.0mm contains 20 metres Blue & Brown Sleeving and 60 metres Green/Yellow sleeving. The 4.0mm contains 10 metres Blue & Brown Sleeving and 40 metres Green/Yellow sleeving.

Green/Yellow and Coloured PVC Sleeving

Dielectric Strength: 20 kV/mm min

Temperature Range: -20°C to 70°C

Elongation at Break: 220% min

Insulation Resistance: 10¹⁰ ohm/cm


Hardness: BSS20-30

Flammability: Self-extinguishing in 30 seconds

Standards: BS 2848/3/85T

Material: PVC

Colour: Green/Yellow, Blue & Brown

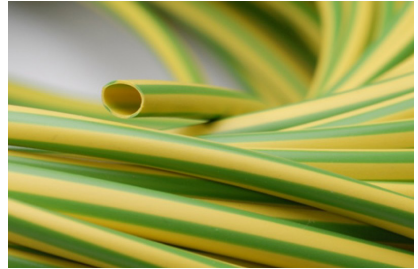

| Code | Internal Diameter | To Cover Cable Size mm ² | Coil Length (m) | |
|------------|-------------------|-------------------------------------|-----------------|--------------|
| | | | Blue & Brown | Green/Yellow |
| PVC-MR-2.0 | 2.0 | | 20 | 60 |
| PVC-MR-3.0 | 3.0 | 0.5-0.75 | 20 | 60 |
| PVC-MR-4.0 | 4.0 | 1.5-2.5 | 10 | 40 |