


## PRE-INSULATED CRIMP TERMINALS

# Pre-Insulated Ring, Fork and Blade Terminals



Made from high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Pre-Insulation is manufactured from Vinyl with a flared barrel for easy wire insertion.

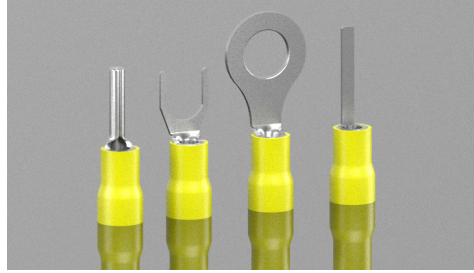

### Pre-Insulated Ring Terminals

Ring terminals connect a single wire to a screw or stud type electrical connection. The terminal connectors ring shape completely surrounds the screw or stud to create a tight connection.

**Temperature Range:** -10°C to 75°C  
**Material:** Tin Plated Copper / Vinyl Insulation  
**Colour:** Red, Blue, Yellow  
**Voltage:** 600V  
**Standards:** DIN 46288 Part 4



Code	Colour	Range mm <sup>2</sup>	ID (A)	ID (B)	Length (L1)	Length (L2)	Width (W)	Pack QTY
RR32	Red - 19A Max	0.5-1.5	1.7	3.3	7.5	17.5	5.5	100
RR37		0.5-1.5	1.7	3.8	7.5	17.5	5.5	100
RR43		0.5-1.5	1.7	4.4	9.4	19.4	6.6	100
RR53		0.5-1.5	1.7	5.4	10.8	20.8	8.0	100
RR64		0.5-1.5	1.7	6.4	16.8	26.7	11.6	100
RR84		0.5-1.5	1.7	8.4	16.8	26.7	11.6	100
RR105	Blue - 27A Max	0.5-1.5	1.7	10.5	20.5	30.5	13.6	100
BR32		1.5-2.5	2.3	3.3	7.8	17.8	6.6	100
BR37		1.5-2.5	2.3	3.8	7.8	17.8	6.6	100
BR43		1.5-2.5	2.3	4.4	11.8	21.8	6.6	100
BR53		1.5-2.5	2.3	5.4	11.8	21.8	8.5	100
BR64		1.5-2.5	2.3	6.4	16.8	26.8	12.0	100
BR84		1.5-2.5	2.3	8.4	16.8	26.8	12.0	100
BR105		1.5-2.5	2.3	10.5	20.5	30.5	13.6	100
BR130		1.5-2.5	2.3	13.0	25.4	35.4	19.2	100
YR43		Yellow - 48A Max	4.0-6.0	3.4	4.4	9.7	23.2	7.2
YR53	4.0-6.0		3.4	5.4	13.0	27.3	9.5	100
YR64	4.0-6.0		3.4	6.4	16.5	29.5	12.0	100
YR84	4.0-6.0		3.4	8.4	21.0	34.5	15.0	100
YR105	4.0-6.0		3.4	10.5	21.0	34.5	15.0	100
YR130	4.0-6.0		3.4	13.0	25.6	39.1	19.2	100