


ZERO HALOGEN NYLON CABLE TIES



Screw Mounted Cable Ties

- Designed with a mount head so the cable tie can be fixed to any surface with a screw
- Head can be used as tie hole for cable identification labels
- UL Approved Nylon 66 giving improved flexibility and mechanical strength
- Black Cable Ties have added Carbon Black, making them UV stable and appropriate for outdoor use, as well as providing great resistance to weathering and ageing.

Temperature Range: -40°C to 85°C


Material: PA66 (Nylon)

Colour: Black or Natural

Flammability Rating: UL94 - V2



Black Code	Natural Code	Nominal Length (A)	Width (B)	Screw Size	Loop Tensile Max Bundle Dia.	Strength (Kg)	Pack QTY
SMT-3.6-150-B	SMT-3.6-150-N	150	3.6	M4	36	18	100
SMT-4.8-200-B	SMT-4.8-200-N	200	4.8	M5	52	22	100
SMT-4.8-300-B	SMT-4.8-300-N	300	4.8	M5	85	22	100
SMT-7.6-300-B	SMT-7.6-300-N	300	7.6	M6	85	54	100
SMT-7.6-380-B	SMT-7.6-380-N	380	7.6	M6	112	54	100

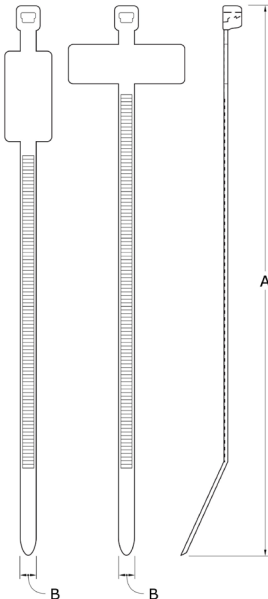

Marker Cable Ties

- Tie and identify cable bundles in one operation
- Large flat area for imprinting or writing information
- Black Cable Ties have added Carbon Black, making them UV stable and appropriate for outdoor use, as well as providing great resistance to weathering and ageing.

Temperature Range: -40°C to 85°C

Material: PA66 (Nylon)

Colour: Black or Natural

Flammability Rating: UL94 - V2



Natural Code	Nominal Length (A)	Width (B)	Loop Tensile Max Bundle Dia.	Strength (Kg)	Pack QTY
MT-2.5-100-N	100	2.5	23	8	100
MT-4.6-190-N	190	4.6	50	22	100



Ident & Wiring Term
Copper Lugs
Heatshrink Repair
Cable Joining
Junction Boxes
Flexible Conduit
Cable Glands
Gland Accs.
Cable Cleats
Earthing Lightning
MCC Cable
Cable Ties & Acc
Tooling & Cable Prep
Fixing & Security