

CABLE HANGERS

Hangers

Cable Hangers

Galvanised Steel Cable Hangers

Cable Hangers are designed for holding power cables in single or multiple runs on walls or support structures. Fabricated from mild steel flat 6mm bar, hot dipped galvanised to BS EN ISO 1461:1999. Special designs are available on request.

The recommended safe working load for each hook is shown below. Hangers with multiple hook configurations are designed to operate with all hooks carrying their maximum load.



- Hanging/routing single and multiple cables to walls or support structures
- Superior strength tensile strength
- Excellent stiffness
- Rounded corners to reduce snagging
- Custom designs available

Temperature Range: -40°C to 150°C

Material: Mild Steel

Finish: Spin Galvanised (55 or 150 micron)

Safe Working Load: 200 kg

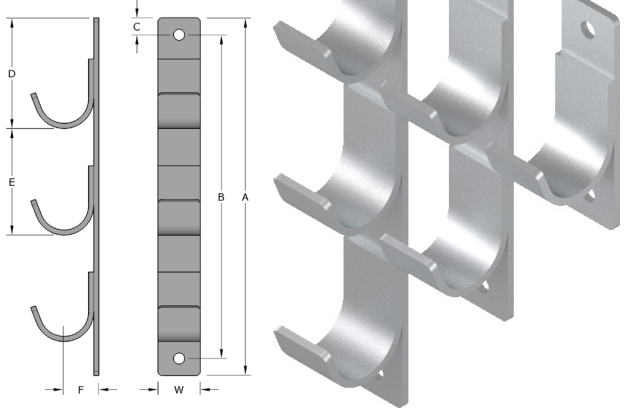

Code	Cable Range			Dimensions					Material Size			Weight
	Min	Max	Ways	(A)	(B)	(C)	(D)	(E)	(F)	(W)	Thickness	(g)
CH1W1	-	50.0	1	145.0	105.0	20.0	105.0	-	37.0	40.0	6.0	500
CH2W1	-	50.0	2	235.0	195.0	20.0	105.0	90.0	37.0	40.0	6.0	900
CH3W1	-	50.0	3	325.0	285.0	20.0	105.0	90.0	37.0	40.0	6.0	1,300
CH4W1	-	50.0	4	415.0	375.0	20.0	105.0	90.0	37.0	40.0	6.0	1,700
CH5W1	-	50.0	5	505.0	465.0	20.0	105.0	90.0	37.0	40.0	6.0	2,100
CH6W1	-	50.0	6	595.0	555.0	20.0	105.0	90.0	37.0	40.0	6.0	2,500
CH1W2	51.0	75.0	1	170.0	130.0	20.0	130.0	-	50.0	50.0	6.0	820
CH2W2	51.0	75.0	2	295.0	255.0	20.0	130.0	125.0	50.0	50.0	6.0	1,480
CH3W2	51.0	75.0	3	420.0	380.0	20.0	130.0	125.0	50.0	50.0	6.0	2,240
CH4W2	51.0	75.0	4	545.0	505.0	20.0	130.0	125.0	50.0	50.0	6.0	2,990
CH5W2	51.0	75.0	5	670.0	630.0	20.0	130.0	125.0	50.0	50.0	6.0	3,710
CH6W2	51.0	75.0	6	795.0	755.0	20.0	130.0	125.0	50.0	50.0	6.0	4,440
CH1W3	76.0	100.0	1	185.0	145.0	20.0	145.0	-	62.0	50.0	6.0	980
CH2W3	76.0	100.0	2	345.0	305.0	20.0	145.0	160.0	62.0	50.0	6.0	1,900
CH3W3	76.0	100.0	3	505.0	465.0	20.0	145.0	160.0	62.0	50.0	6.0	2,820
CH4W3	76.0	100.0	4	665.0	625.0	20.0	145.0	160.0	62.0	50.0	6.0	3,600
CH5W3	76.0	100.0	5	825.0	785.0	20.0	145.0	160.0	62.0	50.0	6.0	4,660
CH6W3	76.0	100.0	6	985.0	945.0	20.0	145.0	160.0	62.0	50.0	6.0	5,600