


CATENARY WIRING SYSTEMS

Catenary Wire

Galvanised Steel Catenary Wire

Galvanised Steel Catenary Wire is available in three stock sizes and two lengths. Also available in a range of PVC coated catenary wire in clear or solid colours as required. Rope can also be coated to suit your application.

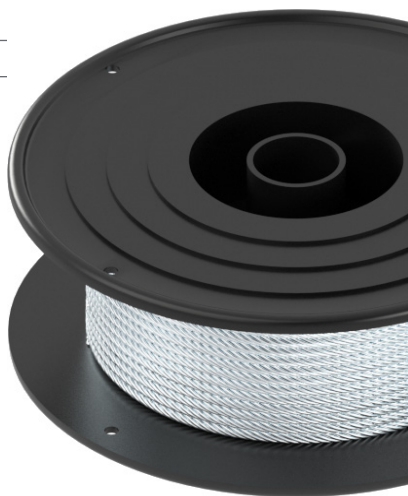

Catenary Wire

Wire Design: 7 x 7 Construction

Standards: BS 302-1:1987

Material: Galvanised Mild Steel / Clear PVC Covered



Standard		PVC Coated		
Code	Code	Length	Width	Min Breaking Load (Kg)
CW30-2	CW30-2PVC	30	2	110
CW100-2	CW100-2PVC	100	2	110
CW30-3	CW30-3PVC	30	3	190
CW100-3	CW100-3PVC	100	3	190
CW30-4	CW30-4PVC	30	4	350
CW100-4	CW100-4PVC	100	4	350
CW30-6	CW30-6PVC	30	6	760
CW100-6	CW100-6PVC	100	6	760

Catenary Wire Kit

Wire Design: 7 x 7 Construction

Standards: BS 302-1:1987

Material: Galvanised Mild Steel



Code	Length	Width	Min Breaking Load (Kg)	Kit Contents
CW30-3K	30	3	190	30m 3mm Galvanised Wire, 1x tensioner, 6x 3mm Wire Grips, 2x 3mm wire eye and 2x Wall Plates
CW100-3K	100	3	190	100m 3mm Galvanised Wire, 1x tensioner, 6x 3mm Wire Grips, 2x 3mm wire eye and 2x Wall Plates




Catenary Wire Grips

Catenary Wire Grips are used on wire rope eye-loop connections, complete loops, end-to-end connections.

Material: Dipped Galvanised Steel



Code	Wire Size	Height (mm)	Width (mm)	Pack QTY
CWG-23	2.0 to 3.0	10	21	20
CWG-4	4.0	10	24	20
CWG-6	6.0	11	26	20



All dimensions in mm except where stated