

# INDUSTRIAL CCG® CABLE GLANDS | Cable Glands

INDOOR/OUTDOOR - UNARMoured

## CCG Posi Flex™ Cable Gland

The Posi Flex Cable Gland is designed for use with unarmoured, elastomeric and plastic cables. Manufactured from brass and encapsulated with a non-corrosive polyester outer body, offering complete protection in the most hostile of environments. Seals on cable outer sheath, to IP68 if fitted with sealing washer.

- For use in highly corrosive environments.
- Brass parts are encapsulated in a corrosion-resistant body.
- Wide sealing range.
- Complete with a fitted elastomeric seal and washer providing IP66/68 protection.
- Supplied complete with IP sealing washer.

**Design Standards:** BS 6121 Part 1 EN 50262  
IEC/BS EN 62444 SANS 62444 & 1213

**Protection:** IP66 / IP68 (100m - Parallel) IEC 60529

**Marine:** ABS IEC 62444  
DNV IEC 60529, BS 6121, IEC 62444


**London Underground Approval:** BS EN 62444





**Temperature Range:** -65°C to 120°C

**Material (Gland):** Brass (Nickel Plated) Encapsulated in Nylon or DMC

**Material (Seal):** Thermoset Elastomer

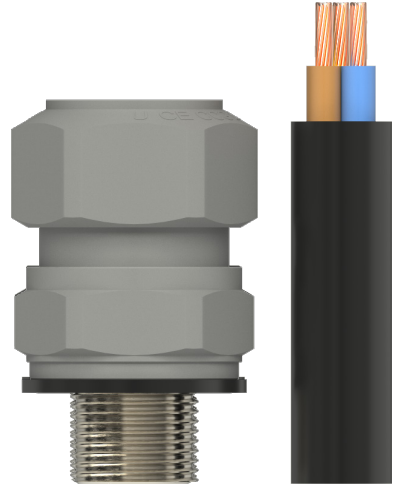

Code	Reference	Cable OD (B)		Gland Length (L2)	Thread Entry (C)	Length (L1)	A/F	A/C
	Size	Min	Max					
053800	00 - 20ss	3.0	8.0	43.0	M20 x 1.5	10.0	30.0	34.0
0538-0	0 - 20s	7.0	11.5	43.0	M20 x 1.5	10.0	30.0	34.0
053801	1 - 20	11.0	15.0	47.0	M20 x 1.5	10.0	34.0	38.0
053802	2 - 25	15.0	20.0	50.0	M25 x 1.5	10.0	42.0	47.0
053803	3 - 32	20.0	26.5	60.0	M32 x 1.5	10.0	52.0	59.0
053804	4 - 40	26.0	34.0	72.0	M40 x 1.5	15.0	62.0	70.0

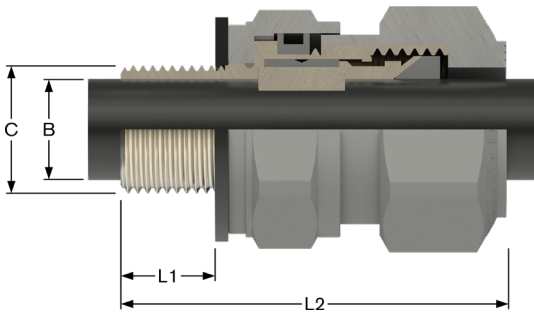

Locknuts Supplied Separately p.177

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution