

Heatshrink & Repair | ELECTRICAL TAPES

TAPES and UNDERGROUND MARKING

Gaffer / Duct Tape

Whatever use you find for Gaffer / Duct tape, whether it be, Fixing, Binding or Repairing you will not be disappointed with our product. Leaving no residue, yet highly adhesive this water resistant tape is ideal for interior or exterior applications.

- Adhesive coated with vacuum hotmelt (synthetic rubber)
- Ideal for fixing, binding and repairs
- Water resistant, highly adhesive and leaves no residue.
- Suitable for interior and exterior use
- Available in Black, Red, Silver & White

Material: Polycloth

Temperature: -15°C to +70°C

Tensile Strength: >60 N/cm

Adhesive: Synthetic Rubber

Elongation: 10-20%



Code	Colour	Width	Length (m)	Thickness (mm)	Box QTY
GT48-B	Black	48	50	0.18	24
GT48-R	Red	48	50	0.18	24
GT48-S	Silver	48	50	0.18	24
GT48-W	White	48	50	0.18	24
GT75-B	Black	75	50	0.18	16
GT75-S	Silver	75	50	0.18	16
GT75-W	White	75	50	0.18	16
GT100-B	Black	100	50	0.18	12
GT100-S	Silver	100	50	0.18	12
GT100-W	White	100	50	0.18	12



Aluminium Foil Tape

Self-adhesive soft Aluminium foil coated tape.

Ideal for internal and external applications including, insulation materials & ventilation and air conditioning systems.

- Soft aluminium foil 48, 75 & 100mm
- 50 micron Aluminium foil
- Consistent performance over a wide service temperature range
- Paper release carrier with emulsion based acrylic adhesive
- Available in three sizes

Material: Aluminium Foil / Paper release carrier with emulsion based adhesive


Adhesive: Acrylic

Temperature: -15°C to +70°C

Total Thickness: 50 micron

Tensile Strength: >12 N/cm

Elongation: 10-20%

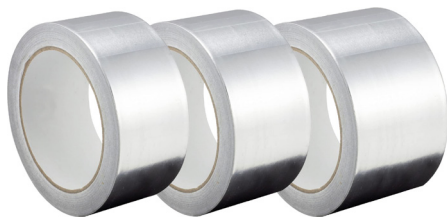

Code	Colour	Width	Length (m)	Thickness (mm)	Box QTY
AT48	Silver	48	50	0.15	24
AT75	Silver	75	50	0.15	16
AT100	Silver	100	50	0.15	12