


Heatshrink & Repair | PVC SLEEVING

PVC SLEEVING

PVC Sleeving

Coloured PVC Sleeving

Our RoHS compliant high grade PVC flexible Earth Sleeving is manufactured from premium virgin grade compound in a wide range of sizes. Standard nominal wall size is 0.5mm, other sizes are available to order. Supplied with green and yellow stripes for use in earth identification and solid colour for electrical contracting purposes. Supplied in continuous 100m coils. Some sizes are available supplied on reels, please contact us for more information

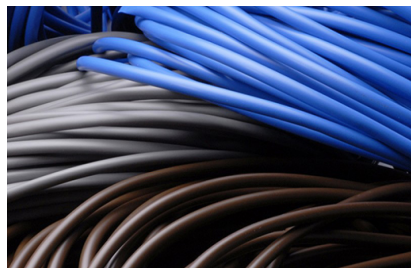

Green/Yellow and Coloured PVC Sleeving

Dielectric Strength: 20 kV/mm min
Temperature Range: -20°C to 70°C

Elongation at Break: 220% min

Insulation Resistance: 10¹⁰ ohm/cm

Hardness: BSS20-30

Flammability: Self-extinguishing in 30 seconds

Standards: BS 2848/3/85T

Material: PVC

Colour: Green/Yellow, Black, Blue, Brown, Yellow, Grey, Red, Green, White



Code	Internal Diameter	To Cover Cable Size mm ²	Coil Length (m)
PVC-2.0-G/Y	2.0		100
PVC-3.0-G/Y	3.0	0.5-0.75	100
PVC-4.0-G/Y	4.0	1.5-2.5	100
PVC-6.0-G/Y	6.0	6.0	100
PVC-8.0-G/Y	8.0	10.0	100
PVC-10.0-G/Y	10.0	16.0-25.0	100



Code	Internal Diameter	To Cover Cable Size mm ²	Coil Length (m)
PVC-2.0-*	2.0		100
PVC-3.0-*	3.0	0.5-0.75	100
PVC-4.0-*	4.0	1.5-2.5	100
PVC-6.0-*	6.0	6.0	100
PVC-8.0-*	8.0	10.0	100
PVC-10.0-*	10.0	16.0-25.0	100

How To Order

PVC - 3.0 - B

↑
Code prefix

↑
Size

↑
Colour:

GY= Green/Yellow
 B = Black
 BL = Blue
 BR = Brown
 Y = Yellow

G = Grey
 GR = Green
 R = Red
 W = White