

Joining | CABLE JOINTS & CONNECTORS

CONNECTORS & TERMINALS

Connector Strips - 12 Way

Package contains 10x Electrical Connector Strips (12 Ways per strip)
Easy-Cut, Captive Screws & Raised for Easy Wiring. Screw holes between each block for quick and secure mounting. Each terminal block has the Current and Voltage rating imprinted below the terminal strip.



Temperature Range: -15 to +80°C

Material: Polyethylene (PE) Housing / Galvanised Steel Screws / Brass Housing

Colour: Natural



Code	Sector mm ²	Rated Current	Rated Voltage	(L)	Width (W)	Dia 1	Dia 2 (D)	(H)	Pack QTY
12WSC3A	4.0	3 Amp	380V	93.0	16.8	2.8	2.3	7.8	10
12WSC5A	6.0	5 Amp	380V	115.0	18.8	3.3	2.6	10.0	10
12WSC10A	10.0	10 Amp	400V	129.0	20.7	4.3	2.8	11.0	10
12WSC15A	12.0	15 Amp	400V	137.0	22.5	4.5	2.8	12.0	10
12WSC30A	16.0	30 Amp	400V	165.0	25.5	5.5	3.0	14.0	10
12WSC60A	25.0	60 Amp	400V	187.0	31.2	6.5	3.8	16.5	10

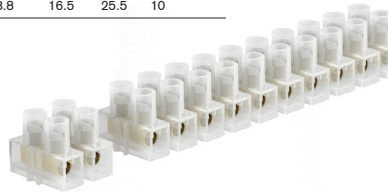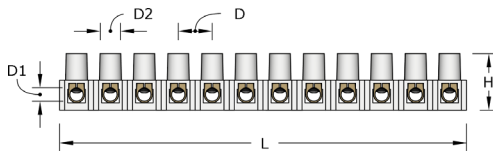

Lever Push-Fit Terminal Blocks

This innovative solution has been developed to offer faster termination of cables into the terminal block safely and consistently. Transparent case provides a clear view to see connections. Ergonomic easy-open levers. Speeds up installation of fine stranded conductors.

• 2, 3 and 5 way options

• Test slots for continuity and voltage testing.

Rating: 32A / 450V

Temperature: 85°C


Material: Polycarbonate UL94 V2

Standards: IEC EN 60998-1, 60998-2-2



Code	Conductors	Rating	Length (L)	Width (W)	Height (H)	Pack QTY
VID-UC-02	2	32A / 450V	18.6	13.1	10.5	100
VID-UC-03	3	32A / 450V	18.6	18.7	10.5	50
VID-UC-05	5	32A / 450V	18.6	29.9	10.5	25

Code	Description	Pack QTY
VID-BK	75 Piece Lever Terminal Box Kit	1



Kit Contents

- VID-UC-02 x 20
- VID-UC-03 x 40
- VID-UC-05 x 15

