


CORD END TERMINALS

Cord Ends


Standard & Dual Cord End Terminals

Standard length cord end terminals are manufactured from tin plated electrolytic copper. We supply 28 different types, in 16 sizes, available in both French and German colour ranges.

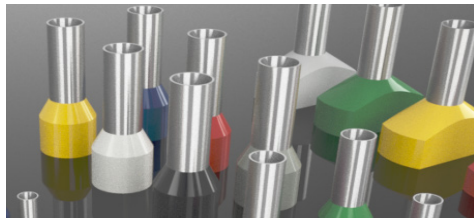

Cord End (Bootlace) Terminals

Ideal to reinforce the fine wire strands when terminating a cable into a connector block. Suitable for tri-rated cables and in accordance with DIN 46288 Part 4.



Temperature Range: -40°C to 105°C

Material: Tin Plated Copper / Nylon Insulation

Colour: Violet, White, Blue, Red, Black, Grey, Orange, Green, Brown, Light Blue, Ivory, Beige

Voltage: 600V

Standards: DIN 46288 Part 4

Colour Code: A = French / B = German



Code	Colour	Range mm ²	ID (A)	ID (B)	Pin (L1)	Length (L2)	Pack QTY
CE0.25A	Violet	0.25	0.8	2.0	6.0	10.4	100
CE0.25B	Lt Blue	0.25	0.8	2.0	6.0	10.4	100
CE0.50A	White	0.50	1.0	2.6	8.0	14.0	100
CE0.50B	Orange	0.50	1.0	2.6	8.0	14.0	100
CE0.75A	Blue	0.75	1.2	2.8	8.0	14.0	100
CE0.75B	White	0.75	1.2	2.8	8.0	14.0	100
CE1.0A	Red	1.0	1.4	3.0	8.0	16.0	100
CE1.0B	Yellow	1.0	1.4	3.0	8.0	16.0	100
CE1.5A	Black	1.5	1.7	3.5	8.0	14.0	100
CE1.5B	Red	1.5	1.7	3.5	8.0	14.0	100
CE2.5A	Grey	2.5	2.3	4.2	8.0	15.0	100
CE2.5B	Blue	2.5	2.3	4.2	8.0	15.0	100
CE4.0A	Orange	4.0	2.8	4.8	9.0	16.0	100
CE4.0B	Grey	4.0	2.8	4.8	9.0	16.0	100
CE6.0A	Green	6.0	3.5	6.0	12.0	22.0	100
CE6.0B	Black	6.0	3.5	6.0	12.0	22.0	100
CE10.0A	Brown	10.0	4.5	7.4	12.0	22.0	100
CE10.0B	Ivory	10.0	4.5	7.4	12.0	22.0	100
CE16.0A	Ivory	16.0	5.8	8.8	12.0	22.0	100
CE16.0B	Green	16.0	5.8	8.8	12.0	22.0	100
CE25.0A	Black	25.0	7.5	11.0	16.0	28.0	100
CE25.0B	Brown	25.0	7.5	11.0	16.0	28.0	100
CE35.0A	Red	35.0	8.3	12.7	16.0	30.0	100
CE35.0B	Beige	35.0	8.3	12.7	16.0	30.0	100
CE50.0A	Blue	50.0	10.3	15.0	19.0	36.0	50
CE70.0A	Yellow	70.0	13.5	16.0	20.0	37.0	50
CE95.0A	Red	95.0	14.7	18.0	25.0	44.0	50
CE120.0A	Blue	120.0	16.7	21.0	27.0	48.0	50



Tooling

See Page 272-273