


# Sheet Terminal

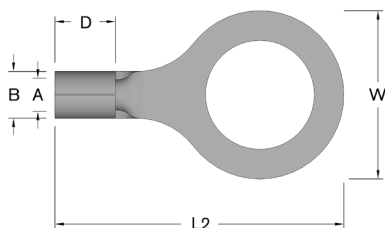


### Sheet Terminal Lugs 600V

Copper Sheet Terminals are manufactured from copper sheet rather than copper tube, allowing for greater hole sizes for lower cable diameters. Available in a variety of sizes ranging from 6mm2 to 25mm2 with varying hole diameters.

**Temperature Range:** up to 75°C

**Material:** Oxygen-Free, High Conductivity Copper Sheet with Silver Alloy Brazing

**Plating:** Tin BS 1872 Part 2



| Code    | Cable Size mm <sup>2</sup> | Stud Size | (A) | (B) | (D)  | (W)  | (L2) | Palm Thickness |
|---------|----------------------------|-----------|-----|-----|------|------|------|----------------|
| 6-16ST  | 6                          | 16        | 4.0 | 6.5 | 9.0  | 25.0 | 43.0 | 1.25           |
| 6-20ST  | 6                          | 20        | 4.0 | 6.5 | 9.0  | 30.0 | 48.0 | 1.25           |
| 6-25ST  | 6                          | 25        | 4.0 | 6.5 | 9.0  | 37.0 | 55.0 | 1.25           |
| 10-16ST | 10                         | 16        | 4.5 | 7.0 | 9.0  | 25.0 | 43.0 | 1.25           |
| 10-20ST | 10                         | 20        | 4.5 | 7.0 | 9.0  | 30.0 | 48.0 | 1.25           |
| 10-25ST | 10                         | 25        | 4.5 | 7.0 | 9.0  | 37.0 | 55.0 | 1.25           |
| 16-16ST | 16                         | 16        | 5.5 | 8.0 | 12.0 | 25.0 | 43.0 | 1.25           |
| 16-20ST | 16                         | 20        | 5.5 | 8.0 | 12.0 | 30.0 | 48.0 | 1.25           |
| 16-25ST | 16                         | 25        | 5.5 | 8.0 | 12.0 | 37.0 | 55.0 | 1.25           |
| 25-16ST | 25                         | 16        | 7.0 | 9.5 | 12.0 | 25.0 | 43.0 | 1.25           |
| 25-20ST | 25                         | 20        | 7.0 | 9.5 | 12.0 | 30.0 | 48.0 | 1.25           |
| 25-25ST | 25                         | 25        | 7.0 | 9.5 | 12.0 | 37.0 | 55.0 | 1.25           |



Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution